STAND-ON SERIES AIR-COOLED

Take your business to the next level.

LIMITED WARRANTY†
2 YEAR
UNLIMITED HRS
COMMERCIAL

Stand-On 26-52

STAND-ON 26

D 52

810 cc, V-Twin, OHV B&S Vanguard petrol engine

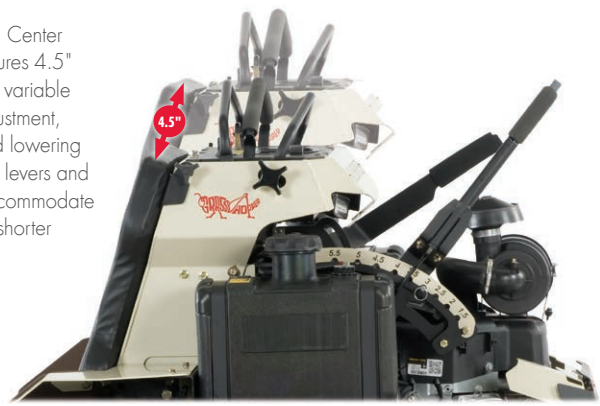

Command Center tower features 4.5" of infinitely variable height adjustment, raising and lowering the control levers and pad to accommodate taller and shorter operators.

D DuraMax® deck

The Stand-On Series is designed for extreme operator proficiency and all-day ergonomic comfort. True ZeroTurn™ maneuverability, outstanding ease-of-use, effortless on/off and legendary Grasshopper cut quality combine to deliver superior performance.

DURABILITY & LONGEVITY

T-Drive™ hydrostatic drive system features tandem pumps-in-reservoir, internal filtration and inline CoolFan™ coupled with Parker high-torque wheel motors design-matched to the engine HP for increased efficiency and simplified maintenance.

Extra-deep, 5.5-inch DuraMax® decks, with anvil-edged design for exceptional durability, deliver superior airflow for better cut quality. Cutting height is effortlessly raised and lowered thanks to the smooth motion of the hand-operated lever.

Engine, T-Drive™ pump and deck smoothly move as one when raising and lowering the cutting height position to keep the drive belt on a uniform horizontal plane for extended life and zero power loss. The service-friendly design includes removable guards and easy access to grease points and filters.

Fleet managers will appreciate the commonality of parts between Stand-On models and the rest of the Grasshopper product line. Four tie-down points secure the mower on the trailer.

COMFORT & ERGONOMICS

The wide anti-slip platform is equipped with adjustable coil-spring suspension and dampeners, insulating the operator from vibrations, for a smooth, shock-reducing, floating-action ride and minimal bouncing.

The Command Center tower features an extra-wide, extra-thick pad with embroidered Grasshopper logo.

The Command Center tower provides 4.5 inches of adjustable range and is positioned to provide a panoramic view of the mowing environment. The intuitive tower design allows for easy reach of all switches, levers and controls. Integrated LED work lights and a deep phone/accessory tray with USB charging ports are standard.

TRACTION & CONTROL

Hydraulically dampened control levers that also provide responsive and effortless maneuvering–including one-hand operation–and return to neutral when released from forward and reverse. Adjustable grip bar accommodates larger and smaller reaches of different operators.

The compact wheelbase provides an incredible power-to-size ratio. Easily fit more units on trailers and maneuver through tighter spaces.

Every Grasshopper mower is designed with a low center of gravity for optimal traction and stability. The centralized location of the engine, T-Drive™ pump and dual fuel tanks on Stand-On models lowers the overall center of gravity, and a total fuel capacity of 9.25 gal/35.0 L reduces the need for frequent refueling.

Mowing speeds up to 15.3 KPH and 1.82 hectares/hr. based on 132 cm cutting width.*

OPTIONS

- Down Discharge™ mulching packages
- Speed-Trimming™ heavy-duty anti-scalp roller
- Flat-proof front tires
- Michelin® X® Tweel® Airless Front Tires (13 x 6.5-6)
- DuraFlex™ suspension forks
- Filter minder
- Side discharge control kit
- Air Dam kit
- Edge-EZE™ edger
- String trimmer mount kit
- Trash bucket kit

Models may be shown with optional equipment. *Actual results may vary. † See warranty card for details

STAND-ON SERIES–SPECIFICATIONS

MODEL – CUTTING WIDTH	STAND-ON 52
ENGINE	
Type/Displacement/Cylinders	
B&S Vanguard/49.4 cu. in. (810cc)/V-Twin	
Lubrication System	
Pressure Lube, Filter	
Crankshaft / Cooling System	
Vertical	
Cooling System	
Air	
Fuel / Capacity	
Petrol - unleaded / 9.25 U.S. Gal. (35.0 l) total fuel capacity – twin tanks with fuel selector	
Air Cleaner	
Heavy-duty, cyclonic, remote-mounted engine dual cleaner with replaceable element	
Muffler	
Ultra-quiet, single, industrial type	
DURAMAX® DECKS	
Construction (Robotic-welded steel)	
Double-layered, 10-gauge plus 7-gauge formed-steel laminate spindle plane 0.313 in. (7.95 mm) thick – more than 25% thicker than 0.25 in. (6.35 mm) – with 7-gauge skirts for geometric strength. Spindle plane is 0.9 in. (22.86 mm) thick in stress zones; anvil-edge design with 0.5 in. (12.7 mm) reinforcement on front edge of deck.	
Blades (MARBAIN®, 1/4-in.)	
(3) 18 in. (45.7 cm)	
Spindle Assemblies	
Sentry™ Spindle System, 2.5 cm (approx. 1 in.) outside diameter (O.D.) shaft; double bearings, greasable from top of deck. Spindle head designed to eliminate fiber wrap. Spindle cones shield housing and lower bearings from fiber wrap and dirt ingestion.	
Spindle Housing	
8-in. (20.3 cm)-diameter machined aluminum housing with 6-bolt pattern	
Spindle Cones	
Spindle cones shield housing and lower bearings from fiber wrap and dirt ingestion	
QuikAjust™ Height Adjustment	
Hand-controlled height adjustment lever with lock/release button	
Cutting Height Range	
1.0 – 5.5 in. (2.5 – 12.7 cm) in 1/4-inch increments	
Blade Drive	
Belt drive with single Kevlar V-belt & idler arm tensioning	
STARTER & ELECTRICAL SYSTEM	
Maintenance-Free Battery/Charging Capacity/Starter	
12 Volt/16 amp/solenoid shift	
Ignition	
Breakerless	
Interlock System	
Prevents engine start when PTO clutch is engaged or steering levers are in drive position; allows operator dismount without engine shutdown only when PTO is disengaged and steering levers are returned to neutral	
ULTIMATE OPERATOR STATION™	
Operator Platform	
Wide anti-slip platform with dampers; extra-thick pad with logo	
Suspension	
Coil spring suspension with dampening	
Console-Mounted Instruments (Command Center)	
Low engine oil pressure, hour meter, phone/accessory tray with USB charging ports, parking brake indicator light, ignition switch, choke & push/pull PTO switch	
Work Lights	
LED	

MODEL – CUTTING WIDTH	STAND-ON 52
TRANSMISSION & STEERING	
Type	
T-Drive™ hydrostatic transmission with tandem 12cc Parker pumps-in-reservoir, in-line CoolFan™ for cooling efficiency, and design-matched Parker high-torque wheel motors	
Filtration/Hydro Fluid	
Self-contained fluid and internal filtration / CoolTemp Hydro-Max™ fluid withstands high and low temperature extremes for extended service intervals	
Speed	
0 – 9.5 mph (0 – 15.3 kph) forward	
0 – 5.0 mph (0 – 8.0 kph) reverse	
Turning Radius	
True zero degree, turns within own length with counter-rotating, independently powered drive wheels	
Steering	
One- or two-handed operation with dual levers that automatically return to neutral from either forward or reverse position	
Brakes	
Dynamic braking through hydrostatic transmission	
Parking Brake	
Manual lever through linkage to bar in tire (compression) brake	
TIRE SIZES	
Drive Wheels – Standard (5-bolt pattern)	
23 x 10.5-12, 350 Mag OTR, 4-ply rated	
Front Casters	
13 x 6.5-6; rib tread, pneumatic with double-sealed bearings to protect from grass wrap	●
13 x 6.5-6; Airless Tweel Caster Wheel	○
DIMENSIONS (Mower & Deck)	
Mulch Width/Length *(Add 1.5 in. (3.8 cm) to width for side discharge with deflector raised. Add 12.0 in. (30.5 cm) to width for side discharge with deflector.)*	
53.0 in. (134.6 cm)/73.0 in. (185.4 cm)	
Height (Command Center – Tower Up)	
50.0 in. (127.0 cm)	
Height (Command Center – Tower Down)	
45.5 in. (115.6 cm)	
Drive Tire Track Width (outside edge to outside edge)	
50.5 in. (128.3 cm)	
WEIGHT	
Uncrated*: (Mower & Deck) 1080 lbs. (489.9 kg)	
*DuraMax® deck mulching package kit weights with high-low mulching blades: 52-in. – 29 lbs. (13.2 kg)	

● *Standard* ○ *Option*

For a complete list of trademarks/registered trademarks, visit ***grasshoppermower.com/legal****.*
Form 0625 © 2025 The Grasshopper Company

Committed to the Cut.®

Proud Partner

The Grasshopper Company • 105 Old U.S. Highway 81
P.O. Box 637 • Moundridge, KS • 67107 U.S.A.
T: **620-345-8621** • **grasshoppermower.com**